

## 10Gb/s SFP+ DWDM 80km Transceiver HXSD-ALxx81x

### Features

- Up to 11.3Gb/s data links
- DWDM EML transmitter and APD receiver
- 100 GHz ITU channel spacing with integrated wavelength locker
- Up to 80km on 9/125μm SMF
- Hot-pluggable SFP+ footprint
- Duplex LC/UPC type pluggable optical interface
- RoHS-10 compliant and lead-free
- Support Digital Monitoring interface
- Single +3.3V power supply
- Compliant with SFF+MSA and SFF-8472
- Metal enclosure, for lower EMI
- Meet ESD requirements, resist 8KV direct contact voltage
- Case operating temperature  
Commercial: 0 ~ +70°C  
Extended: -10 ~ +80°C  
Industrial: -40 ~ +85°C



### Applications

- 10GBASE-ZR/ZW & 10G Ethernet
- SDH STM64
- Other Optical Links

### Part Number Ordering Information

| Part Number  | Data Rate (Gb/s) | Wavelength (nm)               | Transmission Distance(km) | Temperature (°C) (Operating Case) |
|--------------|------------------|-------------------------------|---------------------------|-----------------------------------|
| HXSD-ALxx81C | 10.3125          | Refer to wavelength selection | 80                        | 0~70 commercial                   |
| HXSD-ALxx81E | 10.3125          |                               | 80                        | -10~80 extended                   |
| HXSD-ALxx81I | 10.3125          |                               | 80                        | -40~85 Industrial                 |

## Wavelength Selection: C-band $\lambda_c$ Wavelength Guide Pin Descriptions

| Channel<br>(xx) | Wavelength<br>(nm)                           | Frequency<br>(THZ) | Channel<br>(xx) | Wavelength<br>(nm) | Frequency<br>(THZ) |
|-----------------|--|--------------------|-----------------|--------------------|--------------------|
| 17              | 1563.86                                      | 191.70             | 39              | 1546.12            | 193.90             |
| 18              | 1563.05                                      | 191.80             | 40              | 1545.32            | 194.00             |
| 19              | 1562.23                                      | 191.90             | 41              | 1544.53            | 194.10             |
| 20              | 1561.42                                      | 192.00             | 42              | 1543.73            | 194.20             |
| 21              | 1560.61                                      | 192.10             | 43              | 1542.94            | 194.30             |
| 22              | 1559.79                                      | 192.20             | 44              | 1542.14            | 194.40             |
| 23              | 1558.98                                      | 192.30             | 45              | 1541.35            | 194.50             |
| 24              | 1558.17                                      | 192.40             | 46              | 1540.56            | 194.60             |
| 25              | 1557.36                                      | 192.50             | 47              | 1539.77            | 194.70             |
| 26              | 1556.55                                      | 192.60             | 48              | 1538.98            | 194.80             |
| 27              | 1555.75                                      | 192.70             | 49              | 1538.19            | 194.90             |
| 28              | 1554.94                                      | 192.80             | 50              | 1537.40            | 195.00             |
| 29              | 1554.13                                      | 192.90             | 51              | 1536.61            | 195.10             |
| 30              | 1553.33                                      | 193.00             | 52              | 1535.82            | 195.20             |
| 31              | 1552.52                                      | 193.10             | 53              | 1535.04            | 195.30             |
| 32              | 1551.72                                      | 193.20             | 54              | 1534.25            | 195.40             |
| 33              | 1550.92                                      | 193.30             | 55              | 1533.47            | 195.50             |
| 34              | 1550.12                                      | 193.40             | 56              | 1532.68            | 195.60             |
| 35              | 1549.32                                      | 193.50             | 57              | 1531.90            | 195.70             |
| 36              | 1548.51                                      | 193.60             | 58              | 1531.12            | 195.80             |
| 37              | 1547.72                                      | 193.70             | 59              | 1530.33            | 195.90             |
| 38              | 1546.92                                      | 193.80             | 60              | 1529.55            | 196.00             |
| <b>Non-ITU</b>  | Peak wavelength between<br>1528.77nm-1563.86 |                    | 61              | 1528.77            | 196.10             |

## I. Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

| Parameter                            | Symbol          | Min  | Max | Unit | Notes |
|--------------------------------------|-----------------|------|-----|------|-------|
| Storage Temperature                  | T <sub>S</sub>  | -40  | 85  | °C   |       |
| Power Supply Voltage                 | V <sub>CC</sub> | -0.5 | 3.6 | V    |       |
| Relative Humidity (non-condensation) | RH              | 5    | 95  | %    |       |
| Damage Threshold                     | TH <sub>d</sub> | 0    |     | dBm  |       |

## II. Recommended Operating Conditions

| Parameter                  | Symbol          | Min   | Typical | Max             | Unit | Notes      |
|----------------------------|-----------------|-------|---------|-----------------|------|------------|
| Operating Case Temperature | T <sub>OP</sub> | 0     |         | 70              | °C   | commercial |
|                            |                 | -10   |         | 80              |      | extended   |
|                            |                 | -40   |         | 85              |      | Industrial |
| Power Supply Voltage       | V <sub>CC</sub> | 3.135 | 3.3     | 3.465           | V    |            |
| Data Rate                  |                 |       | 10.3125 |                 | Gb/s |            |
| Control Input Voltage High |                 | 2     |         | V <sub>CC</sub> | V    |            |
| Control Input Voltage Low  |                 | 0     |         | 0.8             | V    |            |
| Link Distance (SMF)        | D               |       |         | 80              | km   | 9/125um    |

## III. General Description

Walsun HXSD-ALxx81x SFP+ transceiver is designed for use in 10-Gigabit Ethernet links up to 80km over single mode fiber. The module consists of DWDM EML Laser, APD and Preamplifier in a high-integrated optical sub-assembly. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472. This module is designed for single mode fiber and operates at a nominal wavelength of 100GHz ITU Grid, C Band DWDM wavelength.

HXSD-ALxx81x transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, and received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP+ MSA defines a 256-byte memory map in EEPROM that is accessible over a 2-wire

serial interface at the 8bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged.

## IV. Pin Assignment and Pin Description

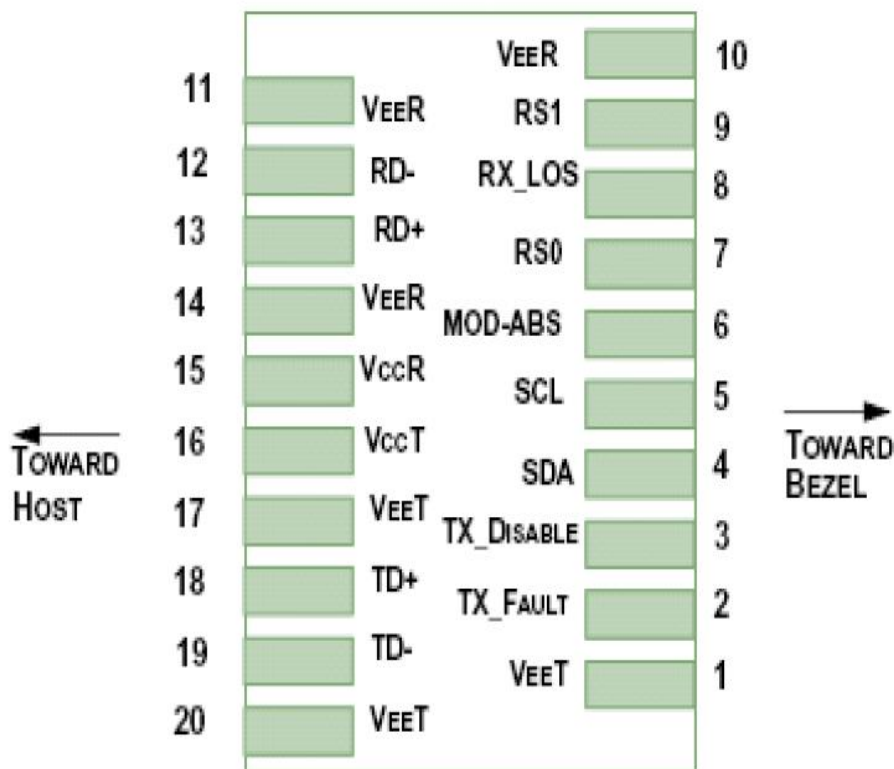


Figure1. Diagram of host board connector block pin numbers and names

| Pin | Symbol             | Name/Description  | Notes |
|-----|--------------------|---|-------|
| 1   | V <sub>EET</sub>   | Transmitter Ground (Common with Receiver Ground)            | 1     |
| 2   | T <sub>FAULT</sub> | Transmitter Fault.  | 2     |
| 3   | T <sub>DIS</sub>   | Transmitter Disable. Laser output disabled on high or open. | 3     |
| 4   | SDA                | 2-wire Serial Interface Data Line                           | 4     |
| 5   | SCL                | 2-wire Serial Interface Clock Line                          | 4     |
| 6   | MOD_ABS            | Module Absent. Grounded within the module                   | 4     |
| 7   | RS0                | Rate Select 0   | 5     |

|    |                  |  |   |
|----|------------------|--|---|
| 8  | LOS              | Loss of Signal indication. Logic 0 indicates normal operation. | 6 |
| 9  | RS1              | No connection required   |   |
| 10 | V <sub>EER</sub> | Receiver Ground (Common with Transmitter Ground)               | 1 |
| 11 | V <sub>EER</sub> | Receiver Ground (Common with Transmitter Ground)               | 1 |
| 12 | RD-              | Receiver Inverted DATA out. AC Coupled                         |   |
| 13 | RD+              | Receiver Non-inverted DATA out. AC Coupled                     |   |
| 14 | V <sub>EER</sub> | Receiver Ground (Common with Transmitter Ground)               | 1 |
| 15 | V <sub>CCR</sub> | Receiver Power Supply  |   |
| 16 | V <sub>CCT</sub> | Transmitter Power Supply                                       |   |
| 17 | V <sub>EET</sub> | Transmitter Ground (Common with Receiver Ground)               | 1 |
| 18 | TD+              | Transmitter Non-Inverted DATA in. AC Coupled.                  |   |
| 19 | TD-              | Transmitter Inverted DATA in. AC Coupled.                      |   |
| 20 | V <sub>EET</sub> | Transmitter Ground (Common with Receiver Ground)               | 1 |

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7kΩ-10kΩ resistor on the host board if intended for use. Pull up voltage should be between 2.0V to V<sub>cc</sub> + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
4. Should be pulled up with 4.7kΩ-10kΩ on host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ-10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## V. Electrical Characteristics

The following electrical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                                    | Symbol                         | Min.                 | Typ. | Max                  | Unit             | Notes |
|--|--------------------------------|----------------------|------|----------------------|------------------|-------|
| Power Consumption                            | p                              |                      |      | 1.8                  | W                |       |
| Supply Current                               | I <sub>cc</sub>                |                      |      | 520                  | mA               |       |
| <b>Transmitter</b>                           |                                |                      |      |                      |                  |       |
| Single-ended Input Voltage Tolerance         | V <sub>cc</sub>                | -0.3                 |      | 4                    | V                |       |
| AC Common Mode Input Voltage Tolerance (RMS) |                                | 15                   |      |                      | mV               |       |
| Differential Input Voltage Swing             | V <sub>in,pp</sub>             | 120                  |      | 820                  | mV <sub>pp</sub> |       |
| Differential Input Impedance                 | Z <sub>in</sub>                | 90                   | 100  | 110                  | Ohm              | 1     |
| Transmit Disable Assert Time                 |                                |                      |      | 10                   | us               |       |
| Transmit Disable Voltage                     | V <sub>dis</sub>               | V <sub>cc</sub> -1.3 |      | V <sub>cc</sub>      | V                |       |
| Transmit Enable Voltage                      | V <sub>en</sub>                | V <sub>ee</sub>      |      | V <sub>ee</sub> +0.8 | V                | 2     |
| <b>Receiver</b>                              |                                |                      |      |                      |                  |       |
| Differential Output Voltage Swing            | V <sub>out,pp</sub>            | 350                  |      | 850                  | mV <sub>pp</sub> |       |
| Differential Output Impedance                | Z <sub>out</sub>               | 90                   | 100  | 110                  | Ohm              | 3     |
| Data output rise/fall time                   | T <sub>r</sub> /T <sub>f</sub> | 28                   |      |                      | ps               | 4     |
| LOS Assert Voltage                           | V <sub>losH</sub>              | V <sub>cc</sub> -1.3 |      | V <sub>cc</sub>      | V                | 5     |
| LOS De-assert Voltage                        | V <sub>losL</sub>              | V <sub>ee</sub>      |      | V <sub>ee</sub> +0.8 | V                | 5     |
| Power Supply Rejection                       | PSR                            | 100                  |      |                      | mV <sub>pp</sub> | 6     |

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Input 100 ohms differential termination.
4. These are unfiltered 20-80% values.
5. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

## VI. Optical Characteristics

The following optical characteristics are defined over the Recommended Operating Environment unless otherwise specified.

| Parameter                            | Symbol          | Min.                       | Typical | Max               | Unit | Notes |
|--------------------------------------|-----------------|----------------------------|---------|-------------------|------|-------|
| <b>Transmitter</b>                   |                 |                            |         |                   |      |       |
| Optical Wavelength                   | $\lambda_c$     | $\lambda_c - 0.1$          |         | $\lambda_c + 0.1$ | nm   | 1     |
| Center Wavelength Spacing            |                 |                            | 100     |                   | GHz  |       |
| Optical Spectral Width               | $\Delta\lambda$ |                            |         | 1                 | nm   |       |
| Side Mode Suppression Ratio          | SMSR            | 30                         |         |                   | dB   |       |
| Average Optical Power                | $P_{AVG}$       | 0                          |         | 5                 | dBm  | 2     |
| Optical Extinction Ratio             | ER              | 8.2                        |         |                   | dB   |       |
| Transmitter and Dispersion Penalty   | TDP             |                            |         | 3.5               | dB   |       |
| Transmitter OFF Output Power         | POff            |                            |         | -30               | dBm  |       |
| Transmitter Eye Mask                 |                 | Compliant with IEEE802.3ae |         |                   |      |       |
| <b>Receiver</b>                      |                 |                            |         |                   |      |       |
| Center Wavelength                    | $\lambda_c$     | 1270                       |         | 1610              | nm   |       |
| Receiver Sensitivity (Average Power) | Sen.            |                            |         | -23               | dBm  | 3     |
| Input Saturation Power (overload)    | Psat            | -8                         |         |                   | dBm  |       |
| LOS Assert                           | LOSA            | -35                        |         |                   | dB   |       |
| LOS De-assert                        | LOSD            |                            |         | -26               | dBm  |       |
| LOS Hysteresis                       | LOSH            | 0.5                        |         |                   | dBm  |       |

Notes:

1.  $\lambda_c$  refer to wavelength selection, and corresponds to approximately 0.8 nm.
2. Class 1 Laser Safety per FDA/CDRH and IEC-825-1 regulations.
3. Measured with Light source 1528.77~1563.86nm, ER=8.2dB; BER≤1E-12 @10.3125Gbps, PRBS=2<sup>31</sup>-1 NRZ.

## VII. Digital Diagnostic Functions

The following digital diagnostic characteristics are defined over the Recommended Operating Environment unless otherwise specified. It is compliant to SFF-8472 Rev10.2 with internal calibration mode. For external calibration mode please contact our sales staff.

| Parameter                             | Symbol   | Min. | Max | Unit | Notes                |
|---------------------------------------|----------|------|-----|------|----------------------|
| Temperature monitor absolute error    | DMI_Temp | -3   | 3   | °C   | Over operating temp  |
| Supply voltage monitor absolute error | DMI_VCC  | -3   | 3   | %    | Full operating range |
| RX power monitor absolute error       | DMI_RX   | -3   | 3   | dB   |                      |
| Bias current monitor error            | DMI_bias | -10  | 10  | %    |                      |
| TX power monitor absolute error       | DMI_TX   | -3   | 3   | dB   |                      |

## VIII. Mechanical Dimensions

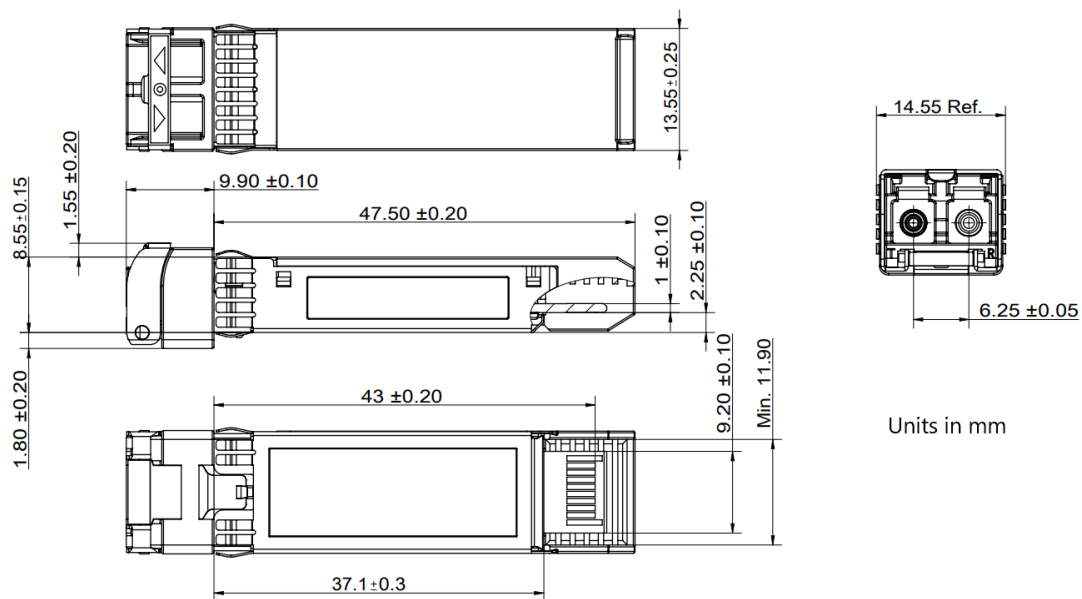


Figure2. Mechanical Outline

## IX. Revision History

| Version No. | Initiated  | Revised contents      | Release Date |
|-------------|------------|-----------------------|--------------|
| 1.0         | Andy Zhang | Preliminary datasheet | 2014-06-11   |
| 1.1         | Andy Zhang | Mechanical Change     | 2016-04-08   |



## X. Contact us

### **Walsun Technology Co., Ltd**

2-5# Tongfufu Industrial Zone, Aiqun Road, Shiyan Street, Baoan District, Shenzhen, China

T. +86 0755-23007456

F. +86 0755-23007451

PC. 518108

E. sales@walsun.com

H. www.walsun.com